

FIG. 1

006227-00675260

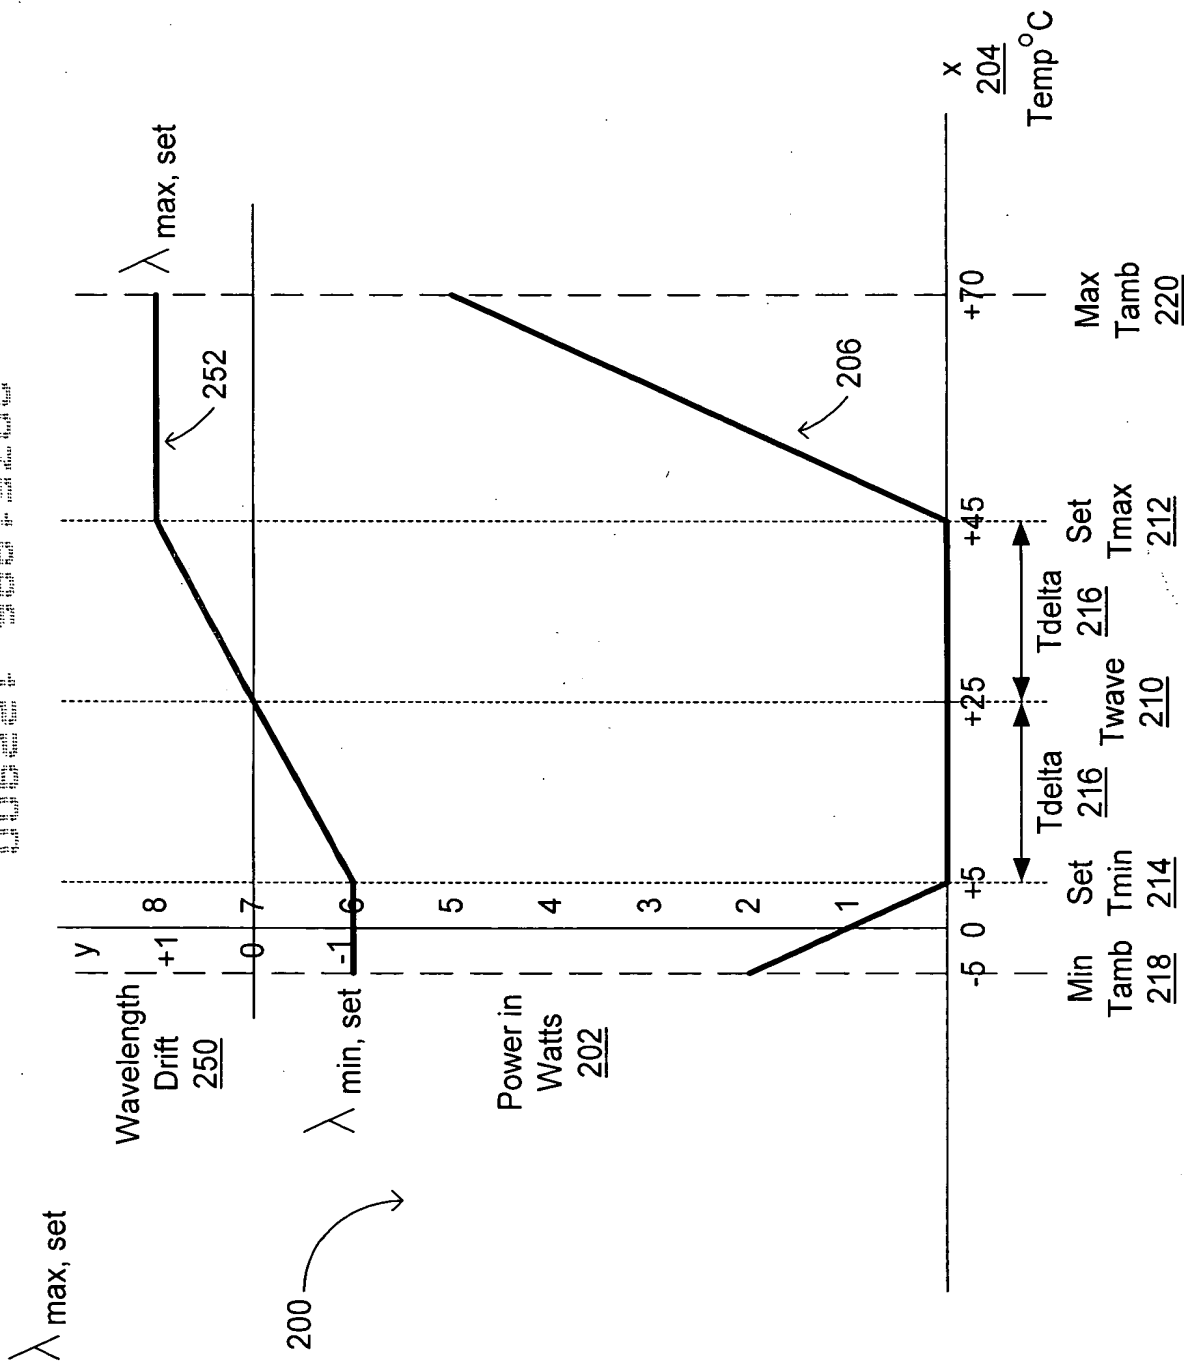


FIG. 2

00621-26615460

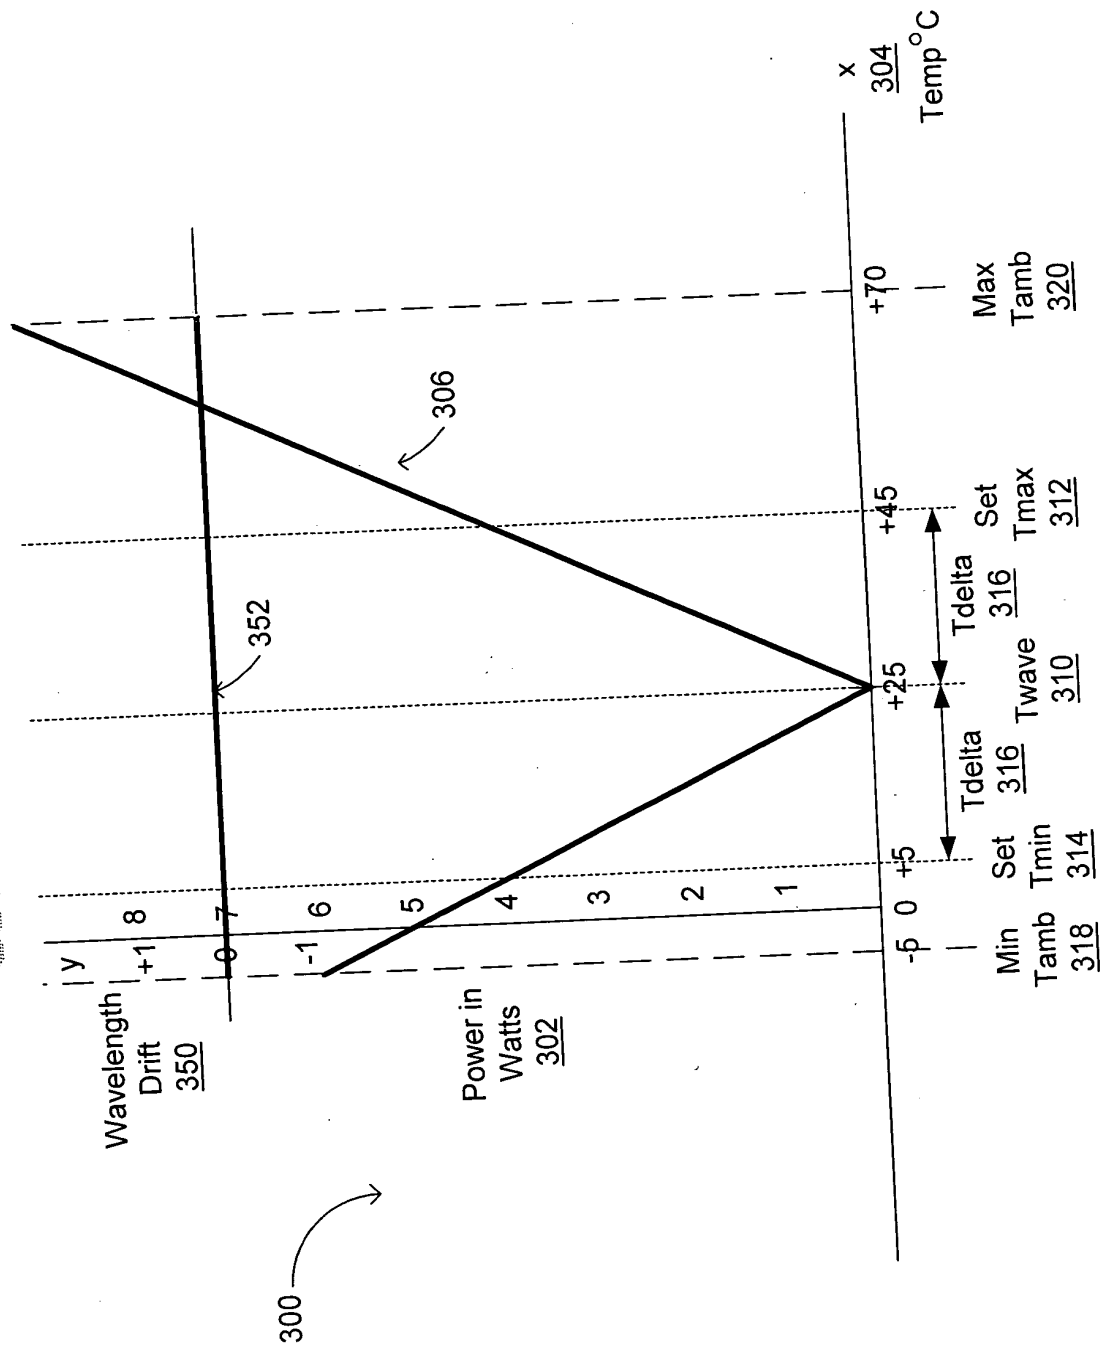


FIG. 3

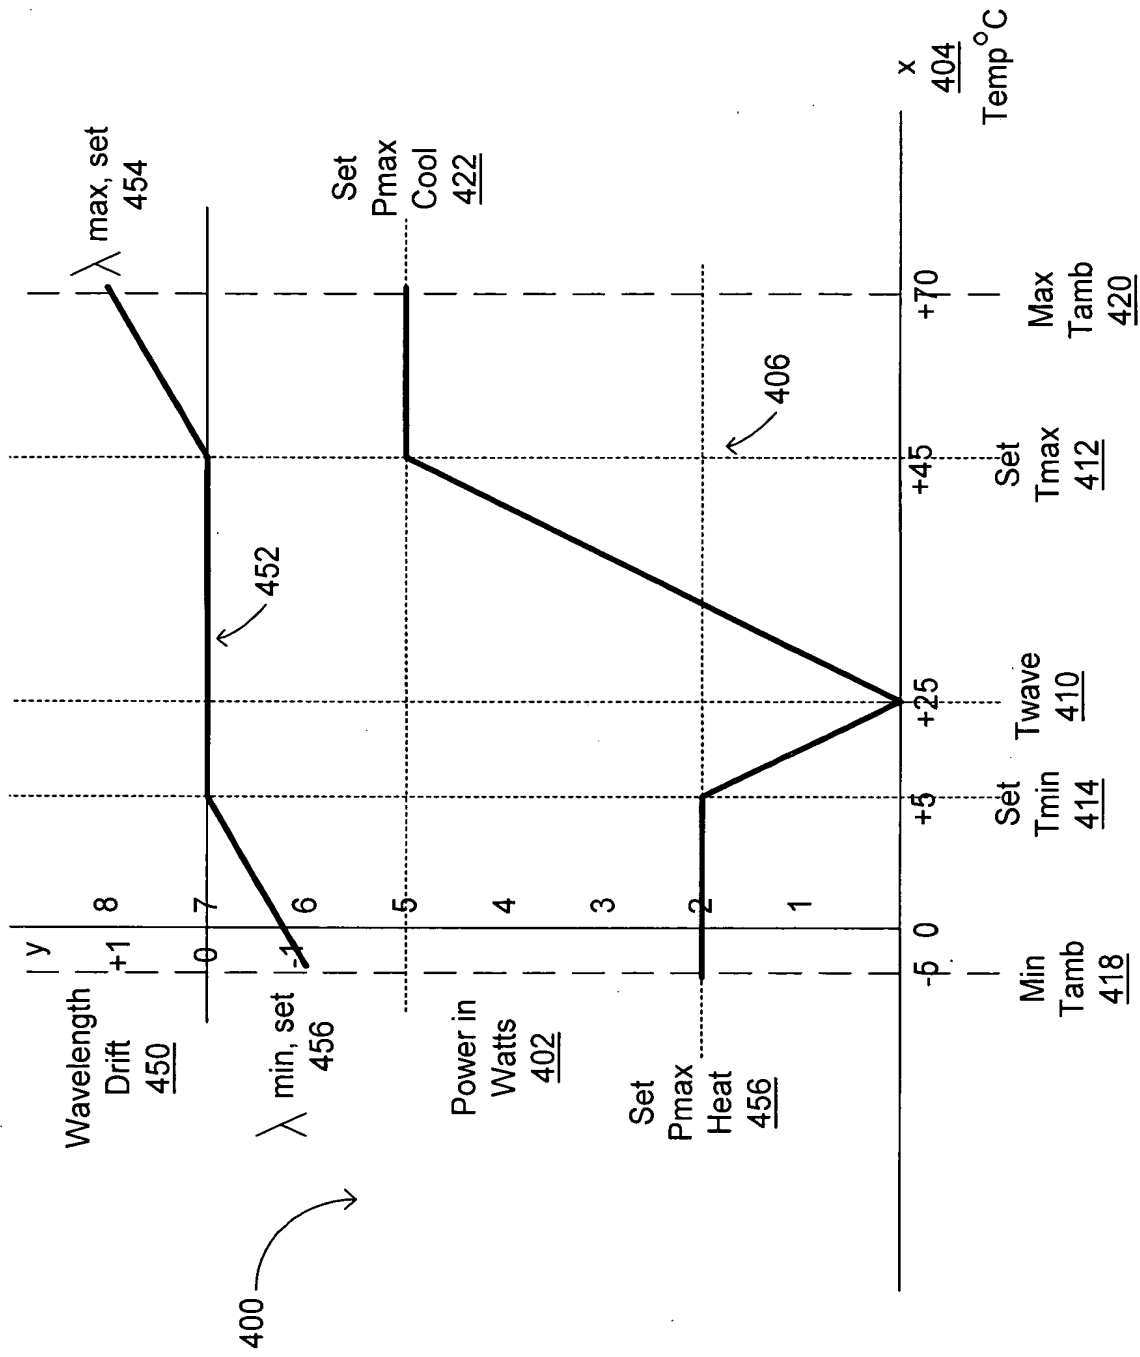


FIG. 4

```

graph TD
    510[510 Couple a laser diode to the thermo-electric cooler, the laser diode configured to transmit signals in one of a standard mode and a low power mode] --> 520[520 Operate a thermo-electric cooler in one of the low power mode and the standard mode]
    520 --> 530[530 Switch between the low power mode and the standard mode]
  
```

**FIG. 5**